




DTT-P4D

特性 Characteristics	单位 Unit	测试条件 Test conditions	DTT-P4D
初始磁导率 μ_i Initial permeability	-	25kHz 0.25mT	25°C 1800 ± 25%
振幅磁导率 μ_a^* Amplitude permeability	-	"25kHz 400mT"	25°C 3100
			100°C 1600
饱和磁通密度 B_s^* Saturation flux density	mT	H=1194A/m	25°C 530
			100°C 450
功耗 P_{cv}^* Power loss	kw/m ³	25kHz 200mT	25°C 130
			100°C 63
		100kHz 200mT	25°C 700
			100°C 415
居里温度 T_c Curie temperature	°C		≥250
电阻率 ρ^* Resistivity	Ω·m		6.5
密度 D^* Density	g/cm ³		4.8

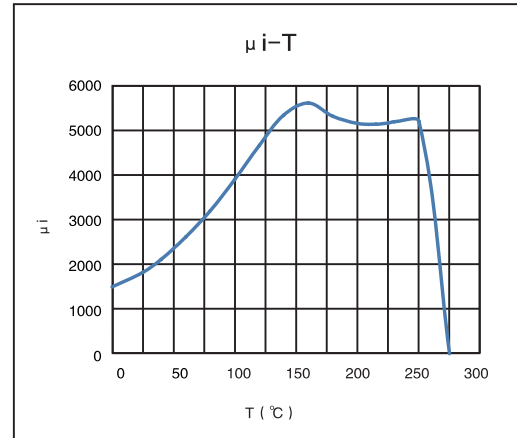

*: 典型值 Average value

